




HIGH VELOCITY AIR / DIRT SEPARATOR

ELBI air & dirt separators are utilized in hydronic systems to efficiently separate and eliminate debris and entrained air. This specialized separator utilizes coalescing media technology to remove air down to 18 microns and debris down to 35 microns. It has been 3rd party tested and found capable of removing 100% of the free air, 100% of the entrained air, and up to 99.6% of the dissolved air in the system fluid during continuous circulation. The units we fabricate are designed to use a skim valve to eliminate floating debris and an automatic air vent to disperse air. Also available is an optional, removable cover for maintenance of the coalescing media cartridge.

ASME CODE SEC. VIII DIV. 1
NATIONAL BOARD REGISTERED
CARBON STEEL
125 PSI @ 270°F
(OTHER DESIGN
PRESSURES AVAILABLE)

*CUSTOM SIZES AVAILABLE

MODEL	PIPE SIZE	A	B	C	D	E	FLOW (GPM)
ASW020-HV	2	14	32 11/16	21 3/4	17	7	114
ASW025-HV	2.5	14	32 11/16	21 3/8	17	7	163
ASW030-HV	3	14	40 1/8	21 1/4	20 13/16	7	252
ASW040-HV	4	14	40 1/8	24	20 13/16	7	439
ASW050-HV	5	20	57 1/2	30	29 3/4	8 1/2	686
ASW060-HV	6	20	57 1/2	29 5/8	29 3/4	9 1/4	987
ASW080-HV	8	24	68 15/16	34 5/8	35 3/4	9 1/4	1713
ASW100-HV	10	30	85 13/16	41 1/4	44 7/16	11 3/8	2706
ASW120-HV	12	30	85 13/16	42 3/4	44 7/16	11 3/8	3876
ASW140-HV	14	36	102 15/16	49 5/8	53 1/4	13	4703
ASW160-HV	16	36	102 15/16	51	53 1/4	13	6264
ASW180-HV	18	36	162	56	82	13	8013
ASW200-HV	20	42	180	61 3/8	91	14	9978
ASW240-HV	24	48	216	72	109	16	14555

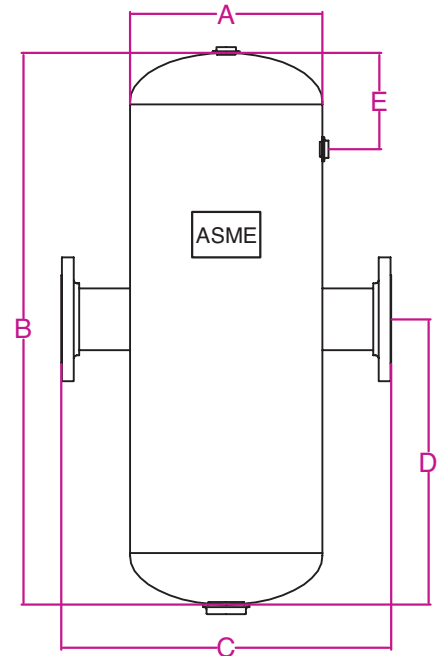

ALL DIMENSIONS ARE IN INCHES

Dimensions are subject to change.

