





Tubular Gauge Valves-Brass

SPECIFICATIONS

- Working pressure: 400 PSI @ 100° F, 200 PSI @ 400° F
- Pressure ratings are subject to the limitations of guage glass
- Temperature Ratings are subject to limitations of packing
- Connection size: ½" NPT
- Glass packing: EPDM
- Equipped with two copper guard rods
- Standard ¼" needle drain valve in lower arm (MODEL 402)

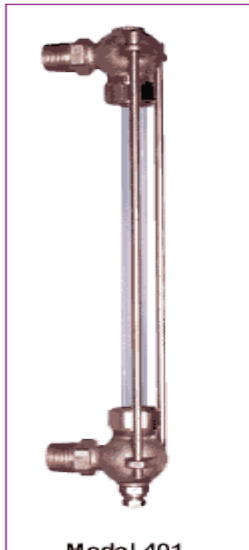

Model 401

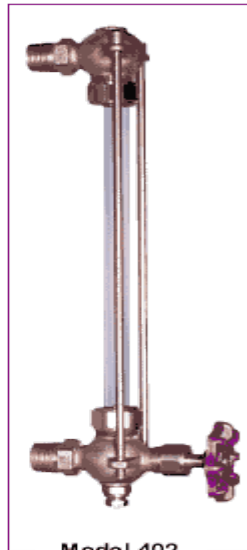

Model 402

MODEL #	GLASS LENGTH	CONNECTION SIZE	GLASS OD	WEIGHT
	INCHES	INCHES	INCHES	LBS.
SG-008	8	½" MALE	5/8" DIAMETER	2
SG-010	10	½" MALE	5/8" DIAMETER	2
SG-012	12	½" MALE	5/8" DIAMETER	2
SG-016	16	½" MALE	5/8" DIAMETER	2
SG-020	20	½" MALE	5/8" DIAMETER	5
SG-022	22	½" MALE	5/8" DIAMETER	5
SG-024	24	½" MALE	5/8" DIAMETER	5
SG-028	28	½" MALE	5/8" DIAMETER	5